


Series 1580

Reinforced PVC Water Suction / Discharge Hose

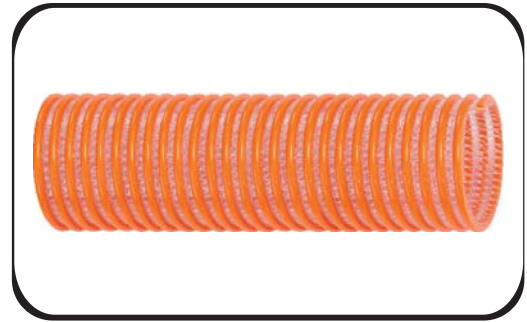

Heavy Duty PVC Suction & Discharge hose designed for applications requiring combined vacuum and higher working pressures. Excellent for use as a fish suction hose and for rental/construction pumping. Clear sidewall allows for easy inspection of material flow and external helix provides for easy drag.

Construction:	Clear PVC w/ Polyester Braid w/ Rigid Orange PVC Helix
Temperature:	-13°F to +140°F (-25°C to +60°C)
Color:	Clear w/ Rigid Orange Helix

Part #	I.D. (In)	O.D. (In)	Bend Radius @ 70°F (In)	W.P. @ 70°F (PSI)	Vacuum Rating (In Hg)	Weight Per 100 Ft (Lbs)	Std. Length	Stock (Yes) or Min. Order
1580-150	1-1/2	2.05	2.5	110	28.0	.47	100'	Yes
1580-200	2	2.62	4.0	100	28.0	.70	100'	Yes
1580-250	2-1/2	3.10	5.0	100	28.0	.82	100'	1000'
1580-300	3	3.72	6.0	100	28.0	1.13	100'	Yes
1580-400	4	4.80	7.1	75	28.0	1.74	100'	Yes
1580-600	6	7.20	10.0	70	28.0	3.88	60'/100'	Yes
1580-800	8	9.35	16.0	60	28.0	5.54	20'/25'	Yes
1580-1000	10	11.63	24.8	40	28.0	8.68	20'/25'	Yes
1580-1200	12	13.66	45.0	28	28.0	10.30	20'	Yes