


Series 1580-LT Reinforced PVC Water Suction / Discharge Hose

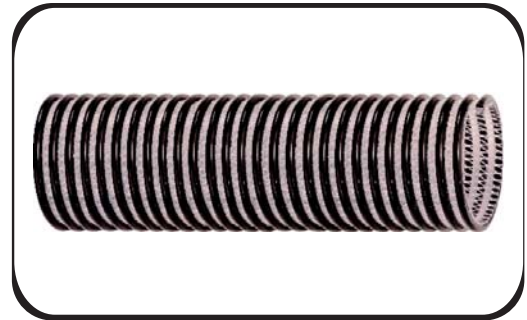

Heavy Duty HMW PVC Suction & Discharge hose designed for applications requiring combined vacuum and higher working pressures, **where low temperature flexibility is required**. Excellent for use as a fish suction hose and for rental/construction pumping. Clear sidewall allows for easy inspection of material flow and external helix provides for easy drag.

Construction:	Clear HMW PVC w/ Polyester Braid w/ Rigid Black PVC Helix
Temperature:	-22°F to +140°F (-30°C to +60°C)
Color:	Clear w/ Rigid Black Helix

Part #	I.D. (In)	O.D. (In)	Bend Radius @ 70°F (In)	W.P. @ 70°F (PSI)	Vacuum Rating (In Hg)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
1580LT-200	2	2.62	4.0	100	28	.70	100'	Yes
1580LT-300	3	3.72	6.0	100	28	1.13	100'	Yes
1580LT-400	4	4.80	7.1	75	28	1.74	100'	Yes
1580LT-600	6	7.20	10.0	70	28	3.88	60'/100'	Yes
1580LT-800	8	9.35	16.0	60	28	5.54	20'/25'	Yes
1580LT-1000	10	11.63	24.8	40	28	8.68	20'/25'	Yes