


Series 1600 Low Temp PVC Suction / Discharge

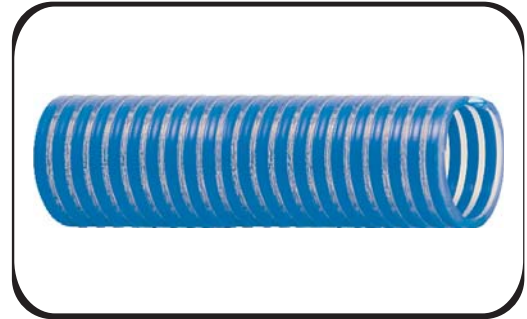

Heavy-duty HMW PVC suction hose for use in construction dewatering, liquid waste, cesspool cleaning, septic handling, agricultural applications, and marine use where low temperature flexibility is required. HMW compound provides improved abrasion resistance over standard PVC.

Construction:	Clear HMW PVC w/ rigid blue PVC helix
Temperature:	-40°F to +150°F (-40°C to +65°C)
Color:	Clear w/ rigid blue helix

Part #	I.D. (In)	O.D. (In)	Bend Radius @ 70°F (In)	W.P. @ 70°F (PSI)	Vacuum Rating (In Hg)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
1600-100	1	1.26	3.0	90	29.8	.22	100'	Yes
1600-125	1-1/4	1.56	4.0	90	29.8	.35	100'	Yes
1600-150	1-1/2	1.83	5.0	90	29.8	.48	100'	Yes
1600-200	2	2.38	7.0	90	29.8	.62	100'	Yes
1600-250	2-1/2	2.89	8.0	70	29.8	.87	100'	Yes
1600-300	3	3.44	10.0	65	29.8	1.23	100'	Yes
1600-400	4	4.50	15.0	55	29.8	1.83	100'	Yes
1600-600	6	6.69	30.0	40	28.0	3.36	100'	Yes