


Series 4210

TUFF FLEX

EN857 Type 2SN-K

One Million Impulse Cycles

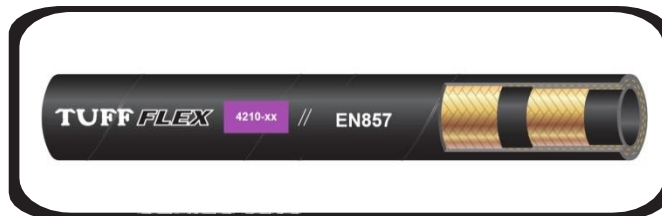

Designed for high impulse, high pressure where a more abrasion resistant hose is needed. MSHA flame retardant “Tuff-Flex” super high abrasion proprietary compound cover.

Tube:	Type A maximum oil resistant synthetic rubber.
Reinforcement:	Two braids of high tensile steel wire.
Cover:	Flame retardant, super high abrasion resistant “Tuff-Flex”. MSHA approved.
Temperature:	-40° F. to +212° F. (-40° C. to +100° C.) (+257 ° F Intermittent) (+125° C)
Branding:	Clear Mylar / White letters with purple box.

Part #	Inside Diameter		Outside Diameter		W.P. (PSI)	Burst (PSI)	Minimum Bend Rad (In.)	Weight Lbs/Ft	Coupling Series
	(In.)	(MM)	(In.)	(MM)					
4210-04	1/4	6.4	0.53	13.5	6525	26,100	1.8	0.18	KW
4210-06	3/8	9.5	0.67	17.0	5585	22,330	2.8	0.26	KW
4210-08	1/2	12.7	0.82	20.8	5000	20,010	2.5	0.35	KW
4210-10	5/8	15.9	0.94	23.9	4205	16,820	5.1	0.41	KW
4210-12	3/4	19.1	1.10	27.9	4060	16,240	6.3	0.53	KW
4210-16	1	25.4	1.40	35.6	2900	11,600	8.3	0.80	KW